


ESTUN
C O D R O I D

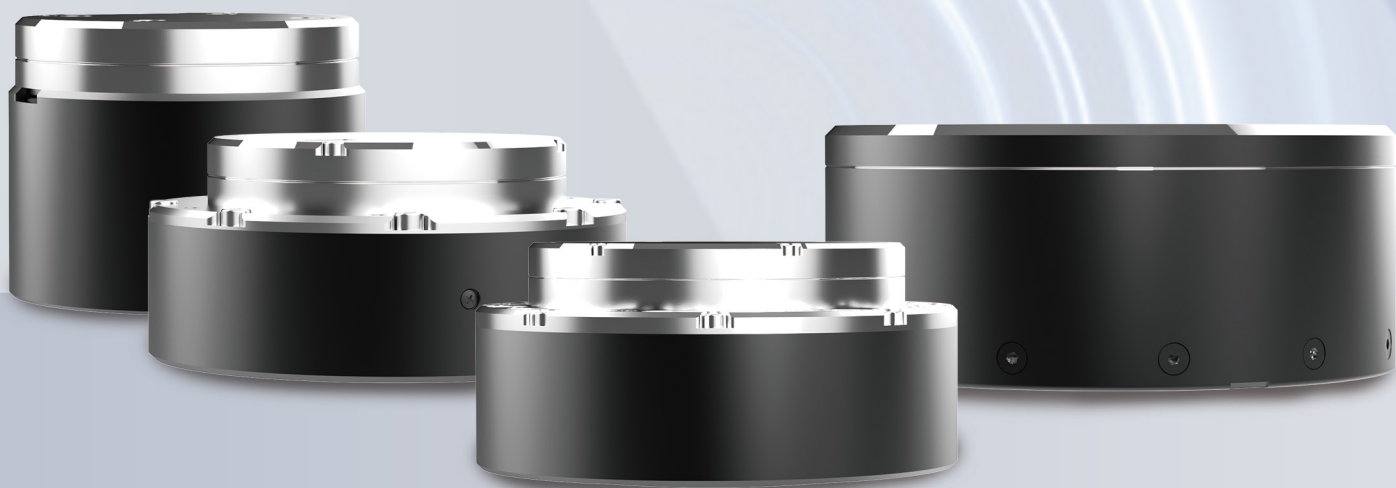

埃斯顿酷卓机器人
CoDrive准直驱关节PA

CoDrive


准直驱关节PA



PA40



PA60



PA80



PA100

CoDrive准直驱关节PA

PA	PA40	PA60	PA80	PA100
				
额定扭矩(Nm)	2	3	11	40
启停扭矩(Nm)	4	6	22	80
瞬间容许最大扭矩(Nm)	6	9	33	120
额定转速(rpm)	60	252	140	118
最大转速(rpm)	170	400	330	158
直径(mm)	53	76	96	116
长度(mm)	42	36.5	48.5	61
中通孔直径(mm)	n.a.	n.a.	n.a.	n.a.
重量(kg)	0.25	0.4	0.7	1.25
减速比	10	6	6	10



低惯量、高精度



扁平紧凑、抗冲击



反向驱动本质安全

